




Microcom Design, Inc.

# Global Solar Radiation Model 200SA Pyranometer

P/N: SR-102

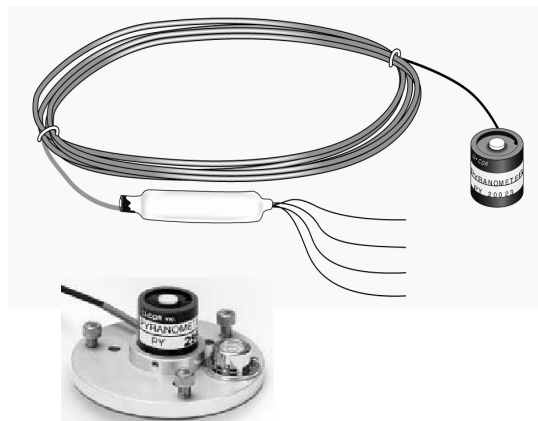

The 200SA Pyranometer is designed for field measurement of global solar radiation in agricultural, meteorological, and solar energy studies. In clear unobstructed daylight conditions, the 200SA Pyranometer compares favorably with first class thermopile type Pyranometer. The 200SA features a silicon photovoltaic detector mounted in a fully cosine-corrected head. Current output, which is directly proportional to solar radiation. The 200SA is calibrated against an Eppley Precision Spectral Pyranometer (PSP) under natural daylight conditions in units of watts per square meter ( $w/m^2$ ). The spectral response of the 200SA does not include the entire solar spectrum, so it must be used in the same lighting conditions as those under which it was calibrated. Therefore, the 200SA should only be used to measure unobstructed daylight.

## Specifications

**Calibration:** Calibrated against an Eppley Precision Spectral Pyranometer (PSP) under natural daylight conditions. Typical error is  $\pm 5\%$

**Sensitivity:** Typically 90  $\mu A$  per 1000 W  $m^{-2}$

**Linearity:** Maximum deviation of 1% up to 3000 W  $m^{-2}$

**Stability:**  $< \pm 2\%$  change over a 1 year period

**Response Time:** 10  $\mu s$

**Temperature Dependence:** 0.15% per  $^{\circ}C$  maximum

**Cosine Correction:** Cosine corrected up to  $80^{\circ}$  angle of incidence

**Azimuth:**  $< \pm 1\%$  error over  $360^{\circ}$  at  $45^{\circ}$  elevation

**Tilt:** No error induced from orientation

**Operating Temperature:**  $-40$  to  $65^{\circ}C$

**Relative Humidity:** 0 to 100%

**Detector:** High stability silicon photovoltaic detector (blue enhanced).

**Sensor Housing:** Weatherproof anodized aluminum case with acrylic diffuser and stainless steel hardware

**Size:** 2.38 Dia.  $\times$  2.54 cm H (0.94"  $\times$  1.0")

**Weight:** 28 g (1 oz)

**Cable Length:** 3.0 m (10 ft)



MB-111-P Mounting Arm

## Ordering Information

Specify Cable length – PN: C-111-PY

Bracket for Tower mount – PN: MB-111-P

### Microcom Design, Inc.

10948 Beaver Dam Road  
Hunt Valley, MD, USA 21030  
Tel: (410) 771-1070  
Fax: (410) 771-0018

E-mail: [sales@microcomdesign.com](mailto:sales@microcomdesign.com)

### Microcom Design Inc.

656-E Capital Circle, NE  
Tallahassee, FL, USA 32301  
Tel: (850) 325-1865

Email: [sales@microcomdesign.com](mailto:sales@microcomdesign.com)

### Microcom Canada

Omnimetrix  
3465 Ashby  
Saint Laurent, QC H4R 2K3  
Tel: (514) 684 1004  
Fax: (514) 697 0400

Email: [roger@omnimetrix.com](mailto:roger@omnimetrix.com)

### Microcom Brazil

Simtech Representacoes LTDA  
Rua do Mercado 17/14 andar Centro  
Rio de Janeiro, Brazil CEP 20010-120  
Tel: 21 2506 5900  
Fax: 21 2240 1242

E-mail: [simtech@simtech.com.br](mailto:simtech@simtech.com.br)